




THERMOCOUPLE ASSEMBLY TYPES

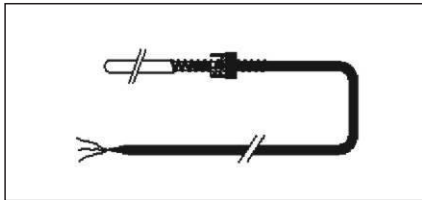


ADJUSTABLE SPRING AND BAYONET

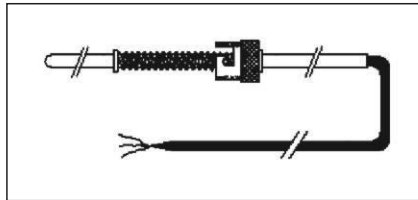


LIMITED ADJUSTMENT
BAYONET STRAIGHT

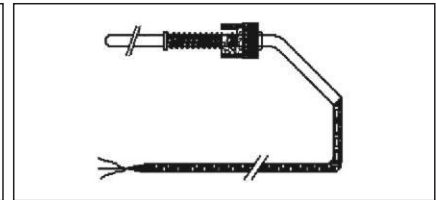


LIMITED ADJUSTMENT
BAYONET ANGLED

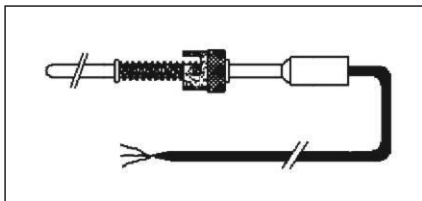


LIMITED ADJUSTMENT BAYONET
STRAIGHT WITH POTSEAL

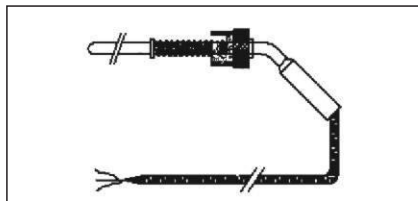

LIMITED ADJUSTMENT BAYONET
ANGLED WITH POTSEAL

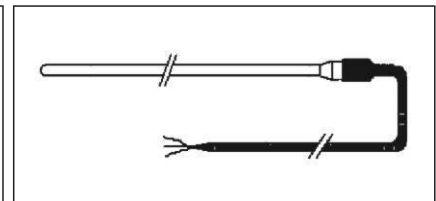

M.I. CABLE WITH POTSEAL

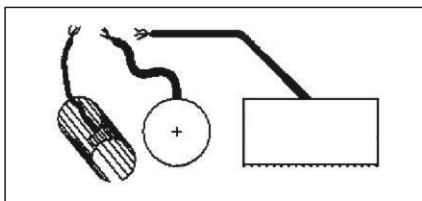

BRASS SHIM TYPE



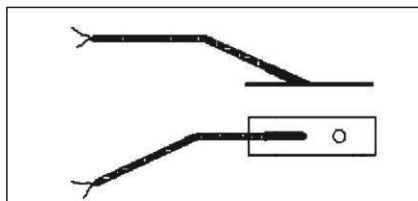



PLATE TYPE

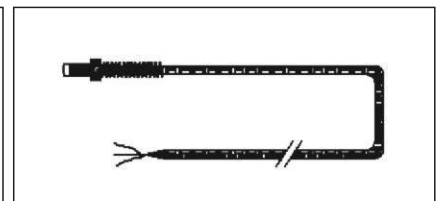


SWIVEL STUD STRAIGHT

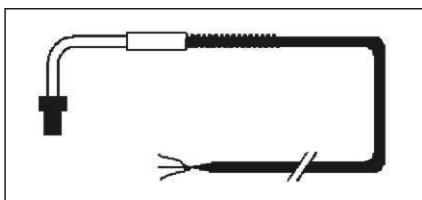


SWIVEL STUD ANGLED

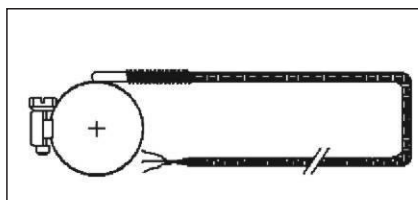


PIPE CLAMP

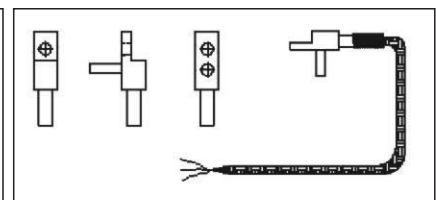


BLOCK TYPE WITH PIN

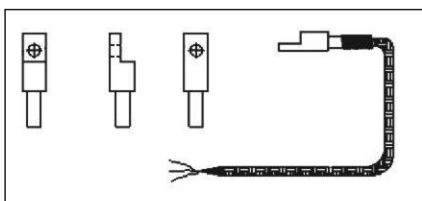


BLOCK TYPE WITHOUT PIN

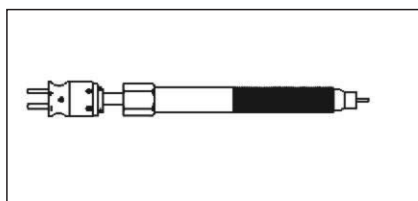


MELT TEMPERATURE PROBE

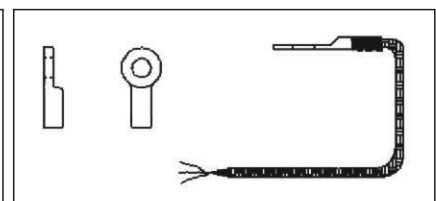


LUG TYPE

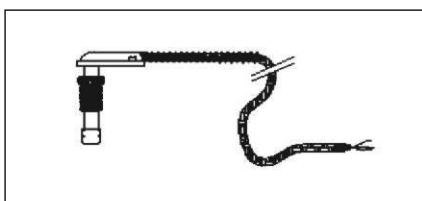

SWIVEL STUD ANGLED
WITH ARBURG HEAD

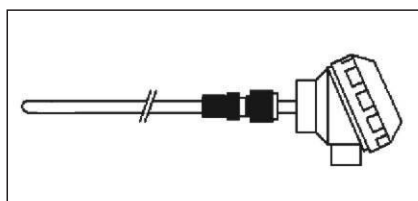

ADJUSTABLE COMPRESSION FITTING
AND TERMINATION HEAD

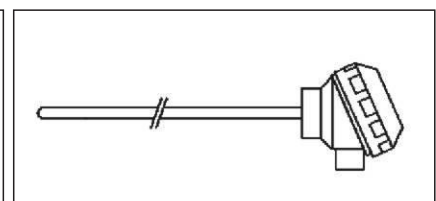



TUBE AND TERMINATION HEAD
NO FITTING

TEMPERATURE SENSORS

Operating temperature limit of cables	
PVC insulated cable	- 40°C + 100°C
Teflon insulated cable	- 190°C + 200°C
Silicone rubber cable	- 40°C + 200°C
Glass fibre insulated cable	- 40°C + 350°C
Mineral insulation sheath*	up to 1100°C

*(Can be higher using special alloys)

Temperature Range of Sensors

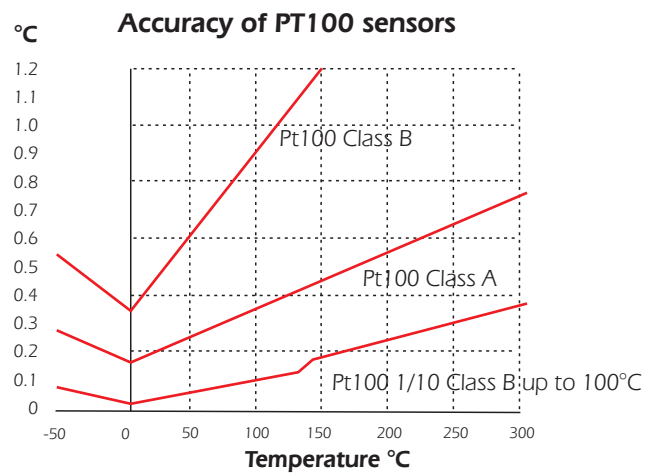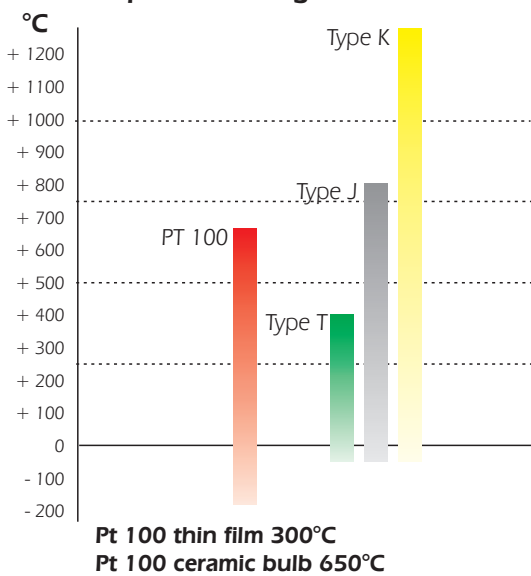

Accuracy of thermocouples

